

PLATFORMS

Single cell

PME



Electronic platforms with top in stainless steel

Small and medium capacity

Accurate and robust

Standard version with approved load cell

Operation with load cell type 350 Ohm "single point" in aluminum, approved according to OIML R60 C3 (3000 divisions)

Degree of protection IP65

Structure in blue oven painted steel tubular, adjustable feet and level bubble

TECHNICAL CHARACTERISTICS PME

Load floor: in stainless steel

Power Supply (max): 15 Vdc

Shielded cable for connection to indicator

Calibration service platform with weight indicator: on request


CE-M 3000e certificate always to match with the calibration service: on request

Support column for indicator: on request

PLATFORMS

Single cell

PME

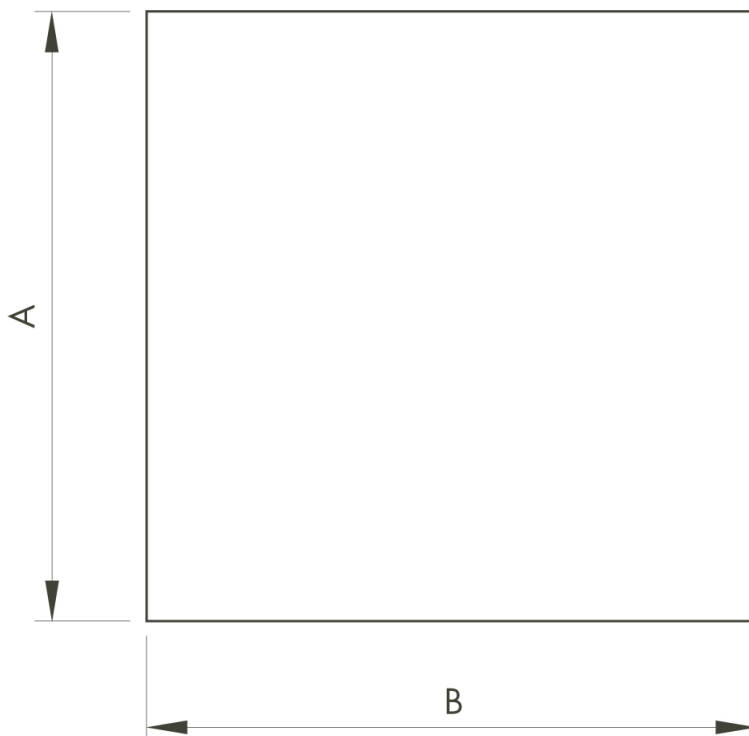

TYPE	CAPACITY (KG)	DIV. (g)	A	B	C
PME0	6-15-30	2-5-10	300	300	130
PME1	30-60-150	10-20-50	400	400	140
PME2	60-150-300	20-50-100	600	600	150
PME3	300-600	100-200	800	800	165